

SÜRME+VASİSTAS PENCERE-KAPIYA AİT BİLGİLER

KANAT GENİŞLİĞİ(KG): MIN 700-1650 mm.


KANAT YÜKSEKLİĞİ(KY): MIN 850-2400 mm.

KANAT AĞIRLIĞI: MAX 150 kg.


MEKANİZMA RENK: NATUREL ELOKSAL

UYGULAMA TİPLERİ


TİP A




TİP A1




TİP B




TİP B1




TİP C

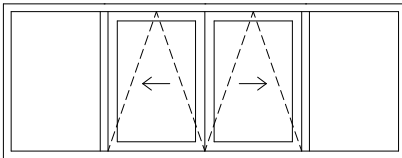


TİP C1

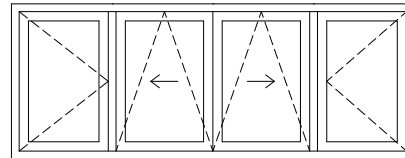



TİP D

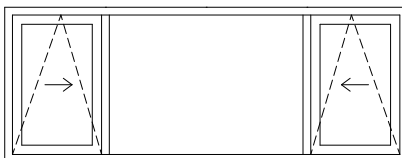

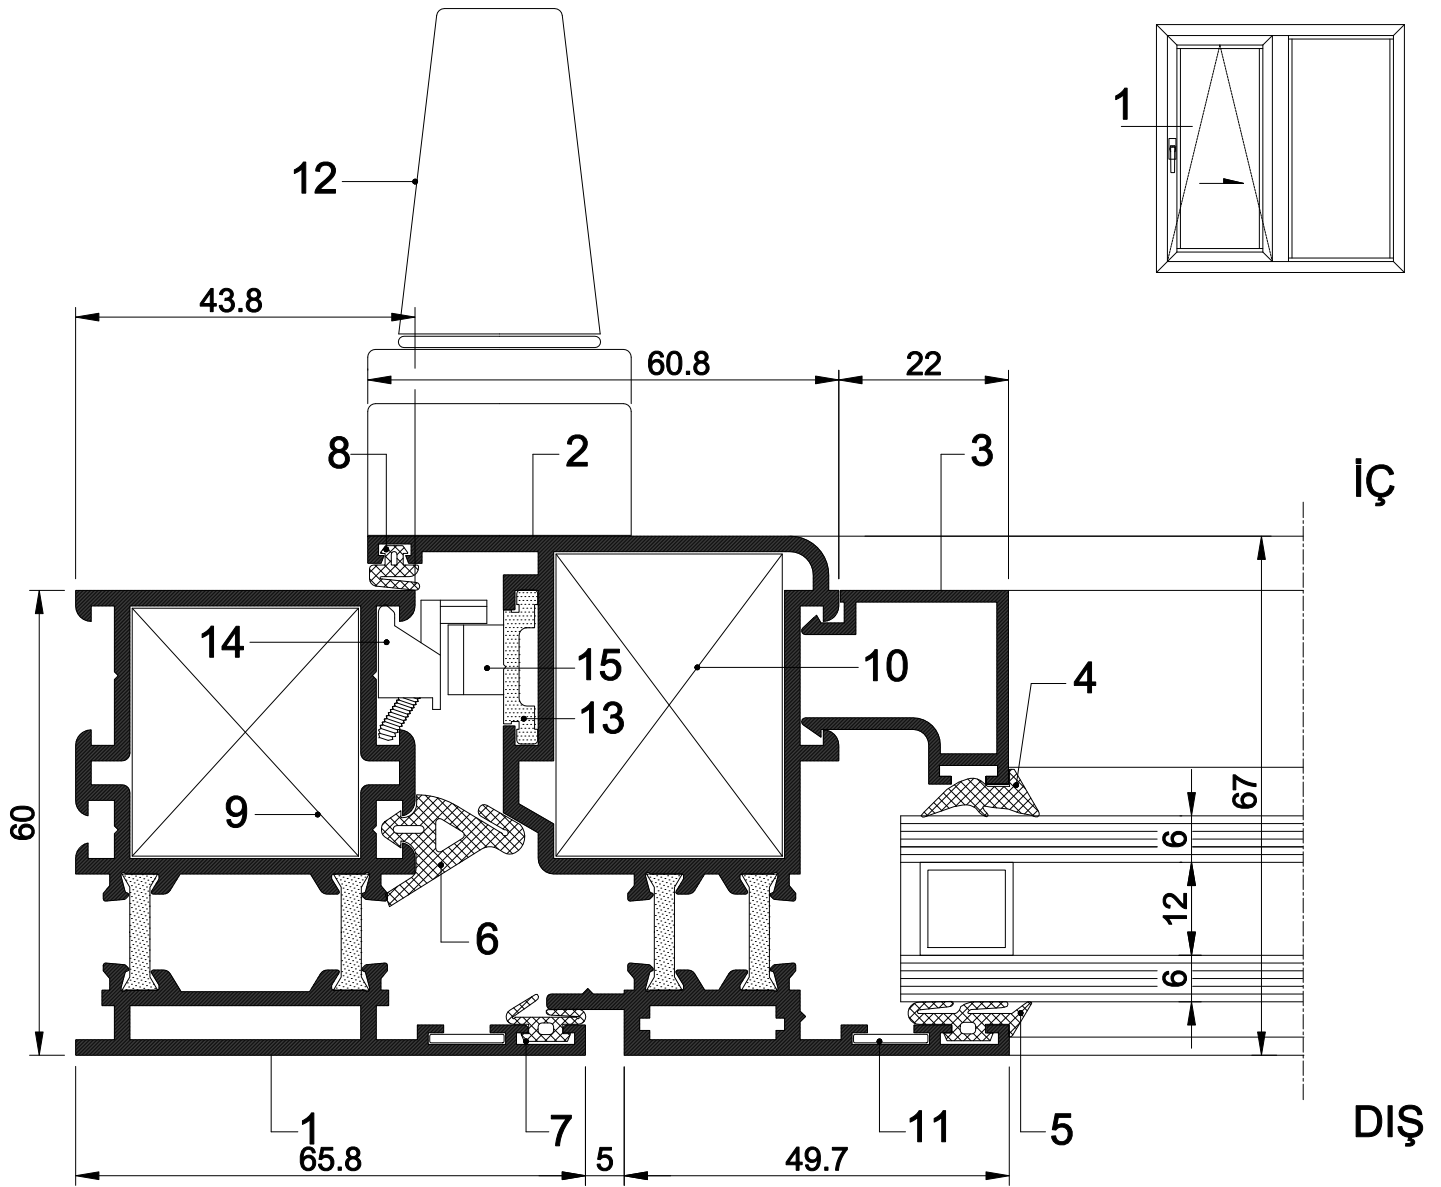


1 DETAYI

1. Kasa Profili	60 E 25	9. Köşe Takozu	99-1151 (32.1 mm)
2. Kanat Profili	60 E 28	10. Köşe Takozu	99-1151 (39.1 mm)
3. Cam Çıta Profili	40 E 78	11. Köşe Gönyesi	40 D 21
4. İç Cam Fitili	40 D 03	12. Kol	88-033
5. Dış Cam Fitili	40 D 02	13. Tij Profili	
6. Kasa Takoz Fitili	50 D 23	14. Ayarlı Karşılık	
7. Dış Bini Fitili	40 D 08	15. İspanyolet pimi	
8. İç Bini Fitili	40 D 06		

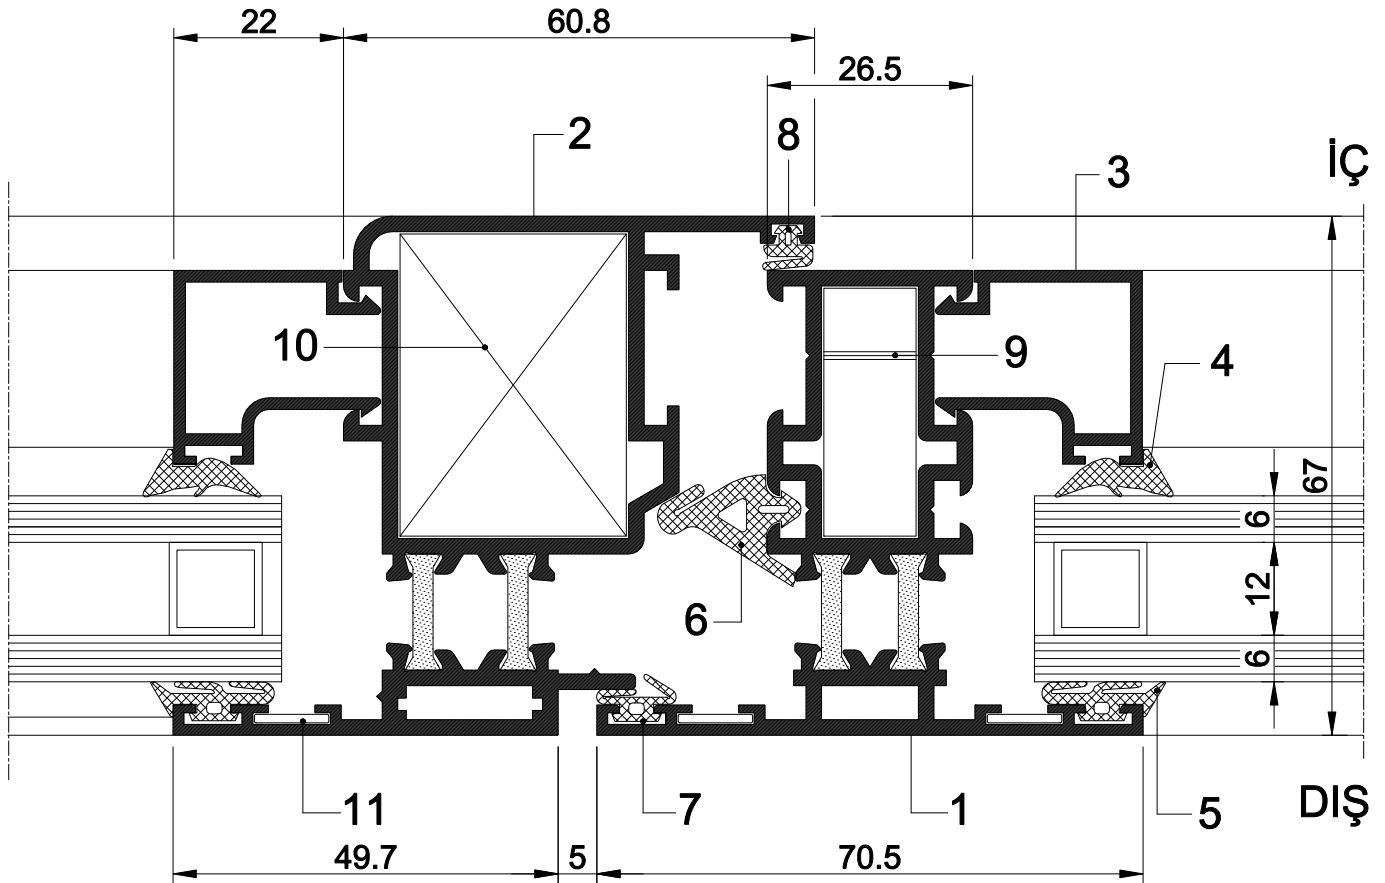


2 DETAYI

1. Kayıt Profili	60 E 27	7. Dış Bini Fitili	40 D 08
2. Kanat Profili	60 E 28	8. İç Bini Fitili	40 D 06
3. Cam Çıta Profili	40 E 78	9. Çektirme Profili	60 E 99 (12 mm)
4. İç Cam Fitili	40 D 03	10. Köşe Takozu	99-1151 (39.1 mm)
5. Dış Cam Fitili	40 D 02	11. Köşe Gönyesi	40 D 21
6. Kasa Takoz Fitili	50 D 23		

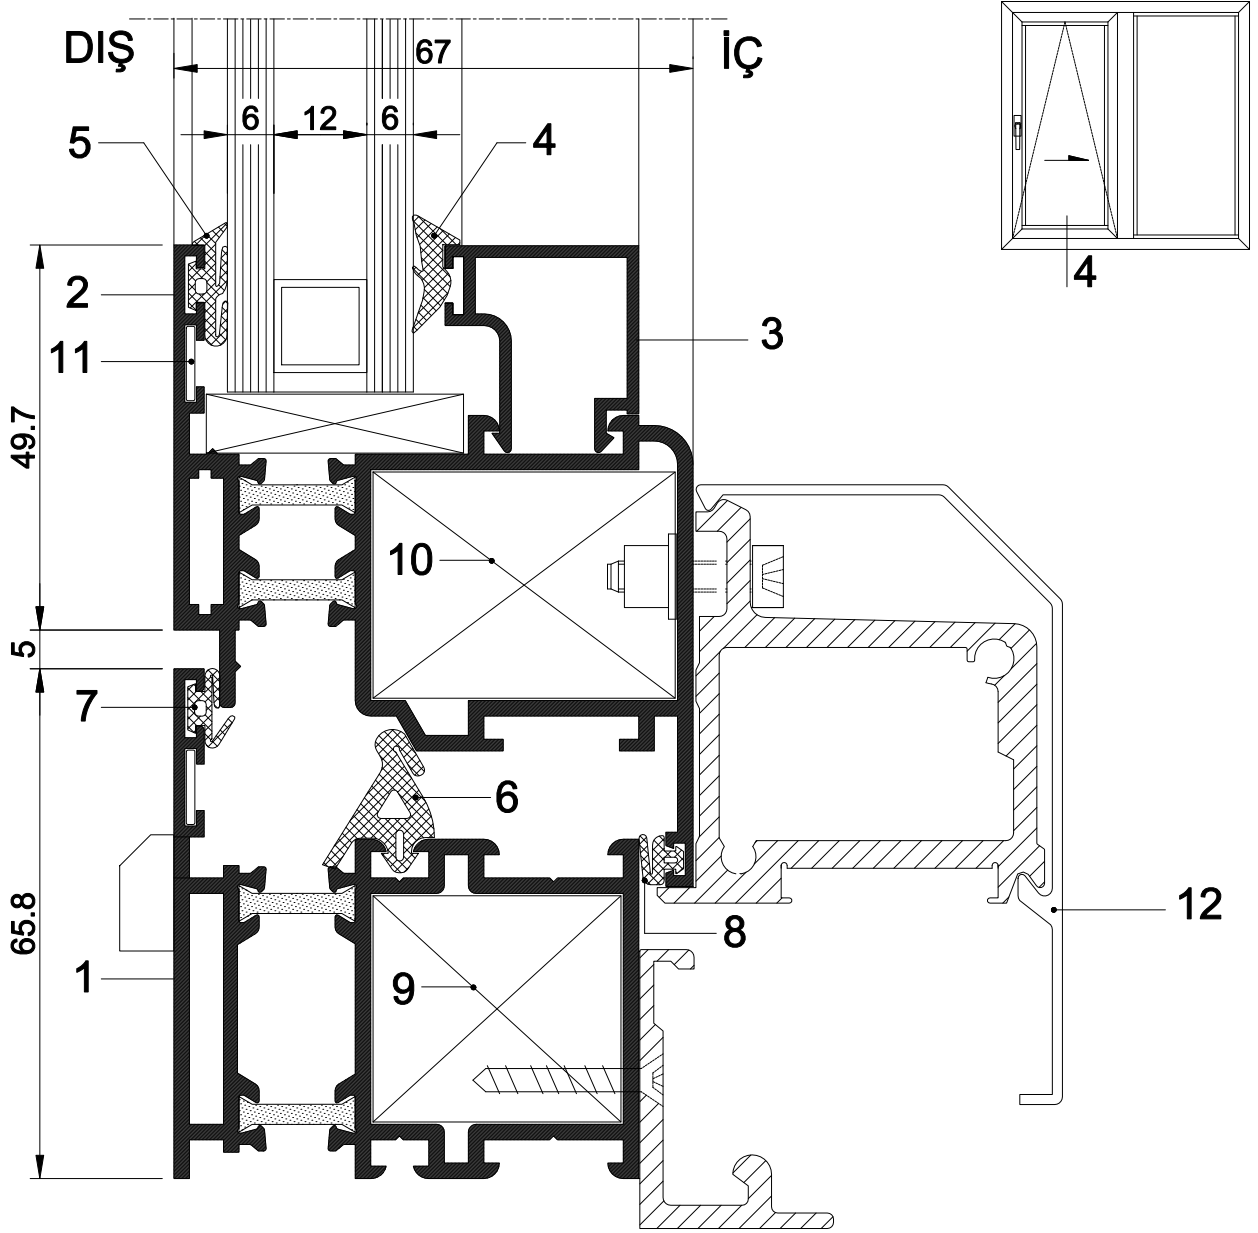

4 DETAYI

1. Kasa Profili	60 E 25	7. Dış Bini Fitili	40 D 08
2. Kanat Profili	60 E 28	8. İç Bini Fitili	40 D 06
3. Cam Çita Profili	40 E 78	9. Köşe Takozu	99-1151 (32.1 mm)
4. İç Cam Fitili	40 D 03	10. Köşe Takozu	99-1151 (39.1 mm)
5. Dış Cam Fitili	40 D 02	11. Köşe Gönyesi	40 D 21
6. Kasa Takoz Fitili	50 D 23	12. Sürme Mekanizması	

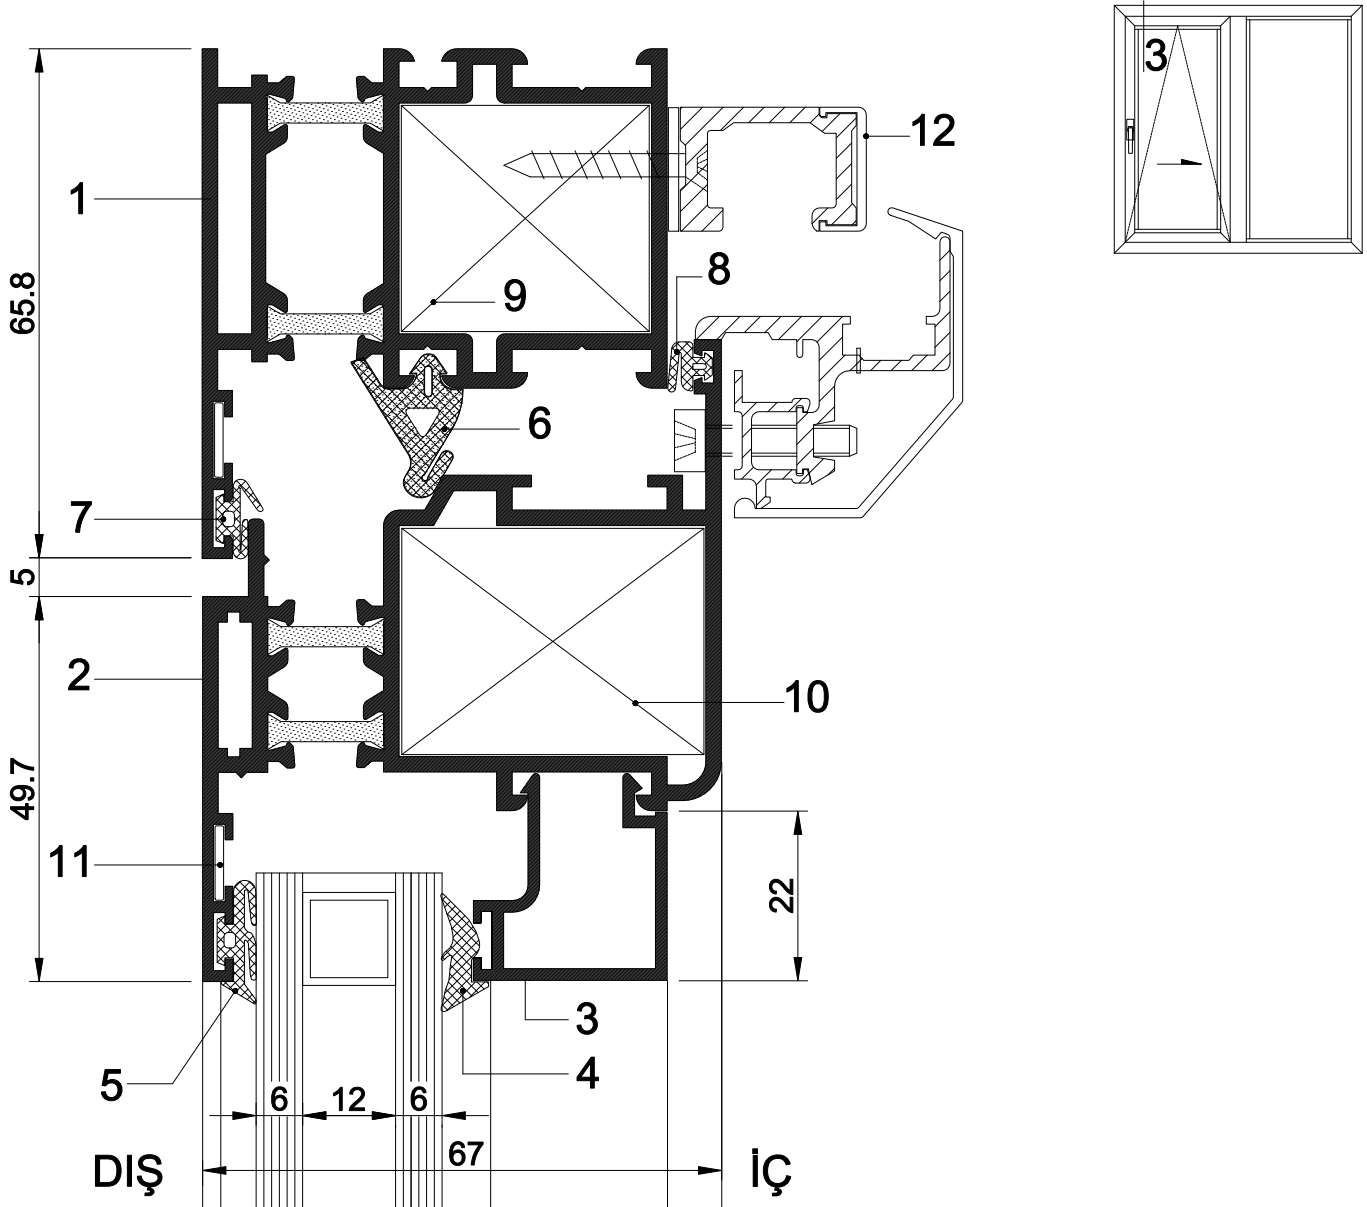

3 DETAYI

1. Kasa Profili	60 E 25	7. Dış Bini Fitili	40 D 08
2. Kanat Profili	60 E 28	8. İç Bini Fitili	40 D 06
3. Cam Çıta Profili	40 E 78	9. Köşe Takozu	99-1151 (32.1 mm)
4. İç Cam Fitili	40 D 03	10. Köşe Takozu	99-1151 (39.1 mm)
5. Dış Cam Fitili	40 D 02	11. Köşe Gönyesi	40 D 21
6. Kasa Takoz Fitili	50 D 23	12. Sürme Mekanizması	